


Epsilon Transitions

An NFA can have ϵ -transitions.

These allow automaton to change state without consuming input char.

Example: Give NFA for all binary strings with either even 0's or odd 1's or both.

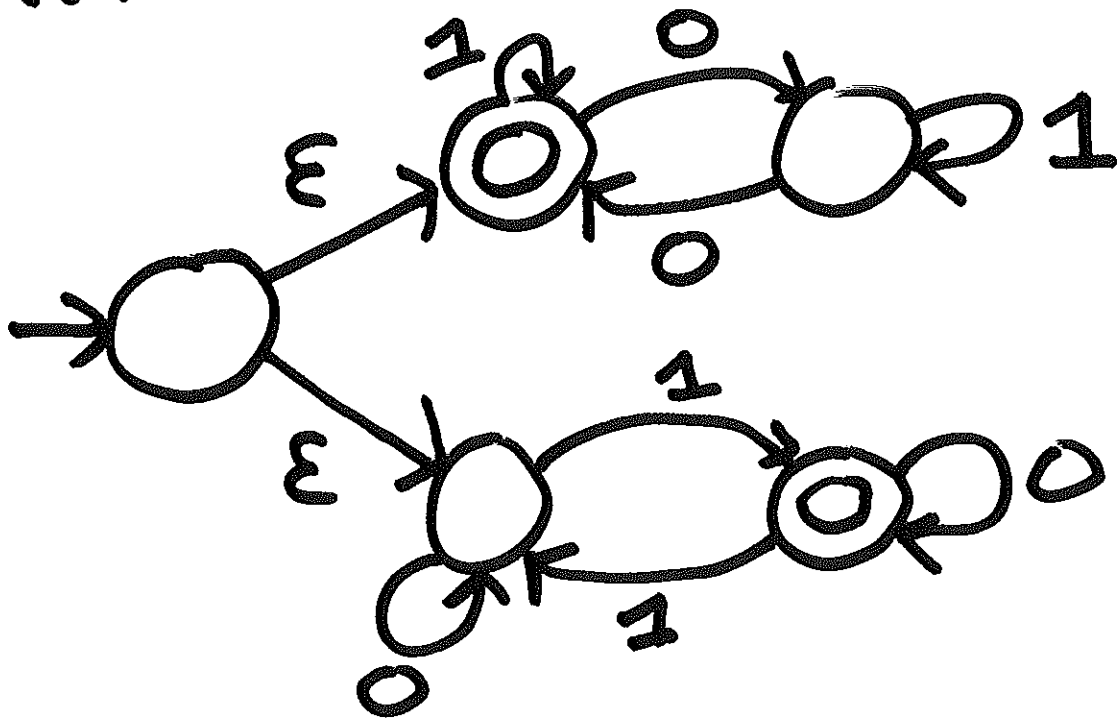

What is Nondeterminism?

- cloned parallelism
- guess-and-verify:
focus on accepting
branch

